

**TA180-001**

3 Fan Speeds - Programmable

**TB180-001**

Staged Fan - Programmable

**TA170-001**

3 Fan Speeds

**TB170-001**

Staged Fan

**Digital Controllers****Fan Coil & Line Voltage** thermostats

Standalone digital thermostats that handle line or low voltage control of heat, cool, outside air and up to 3 fan speeds with 2/4 pipe configuration.

**T180**

- ▶ Programmable
- ▶ 7-day / 4-event
- ▶ 3 Fan speeds w/ setback capability
- ▶ 24 or 110-277 VAC supply voltage selection
- ▶ Key pad lockout
- ▶ 2-pipe/4-pipe fan coil configuration
- ▶ Manual or auto changeover
- ▶ Remote sensor, occupancy setback ready
- ▶ LCD display with backlight
- ▶ Fahrenheit or Celsius display
- ▶ Energy Star, ASHRAE 90.1 & Title 24 compliant

**T170**

- ▶ Non-programmable
- ▶ 3 Fan speeds w/ setback capability
- ▶ 24 or 110-277 VAC supply voltage selection
- ▶ Keypad lockout
- ▶ 2-pipe/4-pipe fan coil configuration
- ▶ Manual or auto changeover
- ▶ Remote sensor, occupancy setback ready
- ▶ LCD display with backlight
- ▶ Fahrenheit or Celsius display
- ▶ ASHRAE 90.1 & Title 24 compliant



*Innovation & experience you can count on*





**T180**  
**T170**

# T180 / T170 thermostats

## Specifications

<b>Temperature Control Range</b>	50 to 90°F / 10 to 32°C factory default, adjustable inward
<b>Maximum Ambient</b>	130°F / 54°C
<b>Load Connections</b>	Wire leads
<b>Agency Approvals</b>	UL, UL Canada
<b>Physical Dimensions</b>	5.8" W x 4.4" H x 1.4" D 14.7 cm x 11.2 cm x 3.6 cm
<b>Mounting</b>	Installs on standard 4" x 4" (10.2 cm x 10.2 cm) device box with 2" x 4" (5.1 cm x 10.2 cm) horizontal mud ring

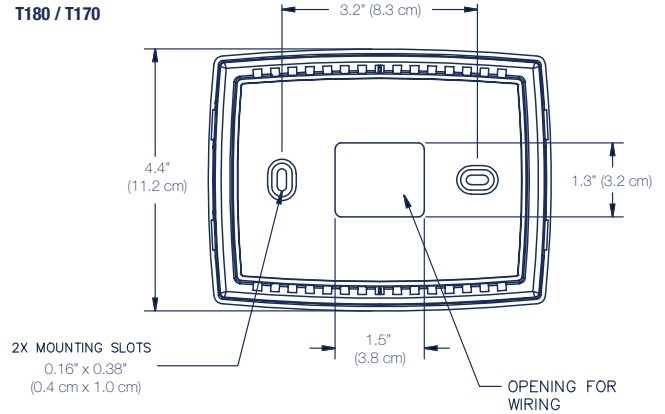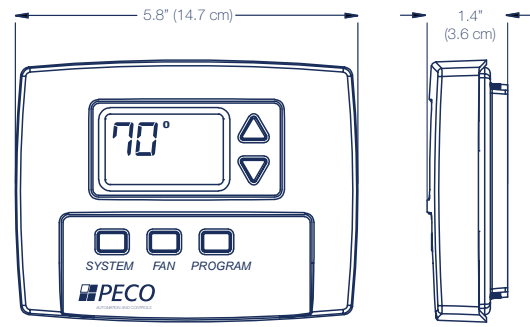

## Technical Data


### Ratings

VOLTAGE	FLA	LRA	RES AMPS	PILOT DUTY	HP
24 VAC	NA	NA	NA	24 VA	NA
120 VAC	5.8	34.8	6.0	125 VA	1/4
240 VAC	2.9	17.4	5.0	125 VA	1/4
277 VAC	2.4	14.4	4.2	125 VA	1/4

### Models & Accessories

Model	Part No.	Description
TA170-001	68348	Non-programmable. 1H/1C, up to 3 fan speeds.
TB170-001	68457	Non-programmable. 1H/1C, up to 3 staged fan speeds.
TA180-001	69378	Programmable. 1H/1C, up to 3 fan speeds.
TB180-001	69379	Programmable. 1H/1C, up to 3 staged fan speeds.
69308	69308	Remote wall sensor
68671	68671	Remote probe, pipe sensor
SB200-001	68375	Occupancy sensor - time based
SK200-001	68381	Occupancy sensor - guest room

## Wiring

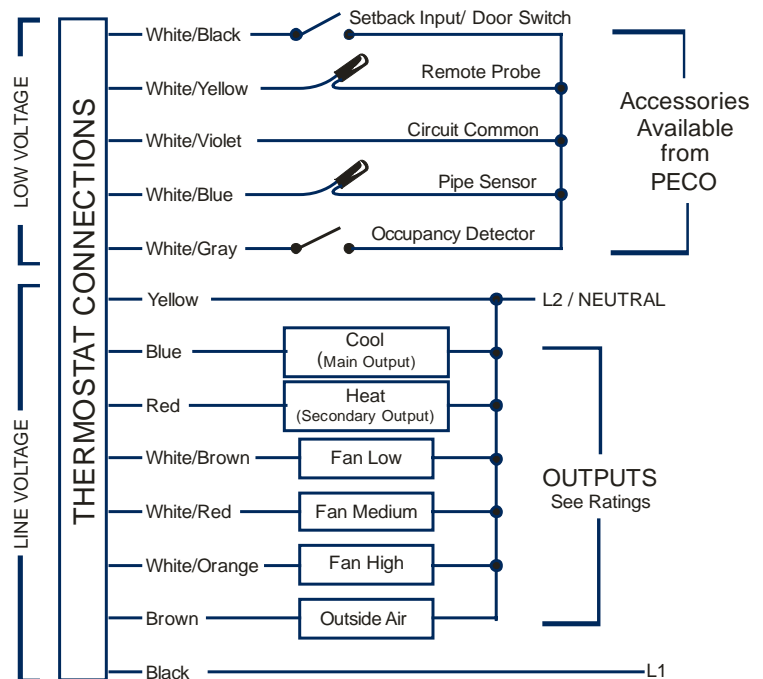

DS T180/T170 - 6/2013 © PECO, Inc. 2013

**T180**  
**T170**



**PECO Controls Systems**  
An Astronics Company  
Clackamas, Oregon - USA

(503)-387-6410  
controls@astronics.com  
www.pecocontrolsystems.com