



T360-3 Wave PRO Wireless Thermostat with Remote Receiver

Wireless Control!

Locate the T360 wireless thermostat on a wall for easy access. The receiver installs at the equipment and makes a remote connection to the Thermostat. No need for wall-to-equipment wiring.

Ideal for retrofit or remodel where running wires is expensive or impossible.

System Features

- Non-programmable
- Heat-Cool-OFF System
- Lo-Auto-High Fan
- 2 Fan Speeds
- Simple to operate

Applications

Ideal for fan Coil and PTAC units in hospitality, multi-family housing, and light commercial environments requiring flexible, wireless temperature control.

Controller Application Support


Contact PECO to optimize feature selection that meet your requirements at Controls@astronics.com.

KEY BENEFITS

- Operation for Heat Pump or Conventional systems
- Heating and Cooling Set point Limits
- B/O Reversing Valve Output
- Independent Heat/Cool Swing (Cycle Rate) Adjustments
- Blue Back light
- Room Temperature Calibration Adjustments
- Mounts on Wall or Junction Box
- Thermostat runs on Battery or 24VAC

Receiver Wiring

Wire Color	Wire Label	Conventional	Heat Pump
RED	R	24 VAC Power	
Black	C	24 VAC Common	
Blue	B	--	B/O Reversing valve
Orange	GL	Fan Low	Fan Low
Green	GH	Fan High	Fan High
White	W	Heat 1	Heat 2
Yellow	Y	Cool 1	Cool/Heat 1

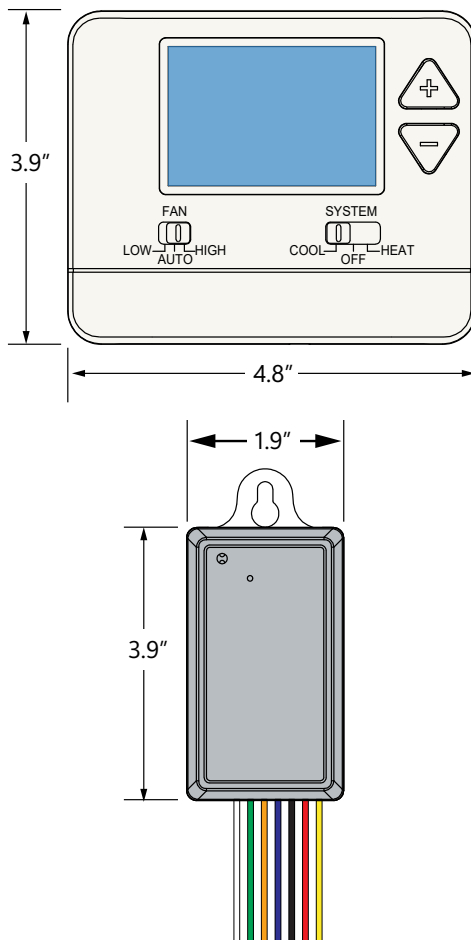

PRODUCT SPECIFICATIONS

Output Ratings

1 Amp per Terminal, 1.5 Amp Maximum Combined.

Technical Data

Operating Range	32°F–99°F (1°C–40°C)
Control Range	44°F–90°F (7°C–32°C)
Thermostat Power	Thermostat: 2 x AAA 1.5V Alkaline Batteries
Receiver Power	24VAC (18–30VAC), 50/60 Hz
Dimensions	4.8" x 3.9" x 1.2"
Operating Frequency	915 MHz

Get Started Today



For additional details, contact PECO Control Systems.
 11241 SE Highway 212 Clackamas, OR 97015
 503-387-6410
Controls@astronics.com
PECOcontrolsystems.com